

MEDIUMWEIGHT PALM-COATED LATEX GLOVE WITH HIGH CUT PROTECTION

Durable high cut resistance grip glove with thermal resistance up to 250°C/484°F for short contact. Great grip in wet and dry handling conditions.

FEATURES

- › Cut resistance: level F / ANSI A5
- › Durable 10g liner made of para-aramid and steel fibre to protect against high cut risks
- › Crinkle latex coating on palm and thumb that offers optimum wet and dry grip
- › Contact heat protection up to 250°C / 482°F for a short period (15 sec max)
- › Designed for easy movement and continuous wear
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit



SUITABLE FOR

Typical Industries

- Public utilities
- Automotive
- Construction
- Glass
- Steel and Metals
- Waste management

Suitable Applications

- Glass Handling
- Metal Fabrication
- Hazardous Recycling
- Paper Manufacturing
- Plastics Manufacturing
- Waste handling

CERTIFICATION



See overleaf for explanation

PRODUCTION INFORMATION

MATERIALS	LINER:	10 gauge para-aramid, steel fibre, nylon
	COATING:	Latex
COLOUR	Yellow/Black/Blue	
LENGTH (mm)	250 (size dependent)	
CUFF STYLE	Elasticated knit wrist	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	SKG00055DD	10 pairs per paper wrap
8/M	SKG00055DF	
9/L	SKG00055DH	
10/XL	SKG00055DJ	
11/XXL	SKG00055DL	120 pairs per case


RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for high thermal (beyond 250°C / 482°F), electrical and chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use
- **WARNING:** Latex may cause allergies

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

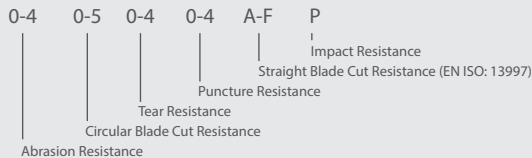

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

GLOBUS

EUROPE

www.globusgroup.com

E: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST & AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICAS

www.globusgroup.com

E: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

© 2023 Globus (Shetland) Ltd | SKY-DATA-TORIN+-1123,1

EU Type-Examination Certificate issued by CCQS Certification Services Limited, Block 1 Blanchardstown Corporate Park, Ballycoolin Road, Blanchardstown, Dublin, D15 AKK1, Ireland (Notified Body No 2834)
 UKCA Type-Examination Certificate issued by CCQS UK Ltd, 25 Wilton Rd, Pimlico, London SW1V 1LW, United Kingdom. [UK Approved Body No. 1105].

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.