


Original Range

Mild Steel Zinc Protected:



Original Range Jubilee® Clips in zinc protected mild steel are the most popular clips in our range. Ideally suited for most day to day requirements for joining hose in areas such as the automotive industry and the automotive aftermarket, agricultural applications, such as irrigation and farm machinery, pneumatic and hydraulic applications in the industrial sector, hardware/DIY applications and in construction.

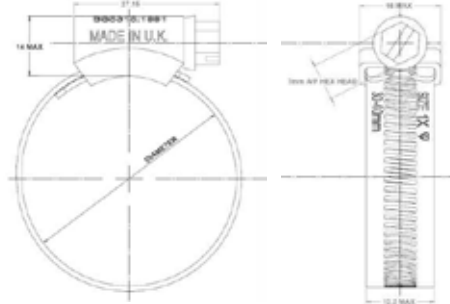

Part No.	BS No.	Adjustment mm	Adjustment Inches	Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure PSI	Part No.
OOO-MS	12	9.5- 12	3/8- 1/2	9.9	0.762	3.4	4.5	203	OOO-MS
MOO-MS	16	11- 16	1/2-5/8	9.9	0.762	3.4	4.5	203	MOO-MS
OO-MS	20	13- 20	1/2-3/4	9.9	0.762	3.4	4.5	203	OO-MS
O-MS	22	16- 22	5/8- 7/8	13.0	0.914	4.2	5.6	203	O-MS
OX-MS	25	18- 25	3/4-1	13.0	0.914	4.2	5.6	203	OX-MS
1A-MS	30	22- 30	7/8-1 1/8	13.0	0.914	5.1	6.8	203	1A-MS
1-MS	35	25- 35	1-1 3/8	13.0	0.914	5.1	6.8	102	1-MS
1X-MS	40	30- 40	1 1/8-1 5/8	13.0	0.914	5.1	6.8	102	1X-MS
1M-MS	45	32- 45	1 1/4-1 3/4	13.0	0.914	5.1	6.8	102	1M-MS
2A-MS	50	35- 50	1 3/8-2	13.0	0.914	5.9	7.9	102	2A-MS
2-MS	55	40- 55	1 5/8-2 1/8	13.0	0.914	5.9	7.9	102	2-MS
2X-MS	60	45- 60	1 3/4 -2 3/8	13.0	0.914	5.9	7.9	102	2X-MS
3-MS	70	55- 70	2 1/8-2 3/4	13.0	0.914	6.7	9	102	3-MS
3X-MS	80	60- 80	2 3/8-3 1/8	13.0	0.914	6.7	9	44	3X-MS
4-MS	90	70- 90	2 3/4-3 1/2	13.0	0.914	6.7	9	44	4-MS
4X-MS	100	85-100	3 1/4-4	13.0	0.914	6.7	9	44	4X-MS
5-MS	120	90-120	3 1/2-4 3/4	13.0	0.914	6.7	9	44	5-MS
6-MS	140	110-140	4 3/8-5 1/2	13.0	0.914	6.7	9	44	6-MS
6X-MS	150	120-150	4 3/4-5 7/8	13.0	0.914	6.7	9	18	6X-MS
7-MS	165	135-165	5 1/4-6 1/2	13.0	0.914	5.9	7.9	18	7-MS
7 1/2-MS	190	158-190	6 1/4-7 1/2	13.0	0.914	5.9	7.9	18	7 1/2-MS
8 1/2-MS	216	184-216	7 1/4-8 1/2	13.0	0.914	5.9	7.9	18	8 1/2-MS
9 1/2-MS	242	210-242	8 1/4-9 1/2	13.0	0.914	5.9	7.9	18	9 1/2-MS
10 1/2-MS	267	235-267	9 1/4-10 1/2	13.0	0.914	5.9	7.9	18	10 1/2-MS
11 1/2-MS	292	260-292	10 1/4-11 1/2	13.0	0.914	5.9	7.9	18	11 1/2-MS
12 1/2-MS	318	286-318	11 1/4-12 1/2	13.0	0.914	5.9	7.9	18	12 1/2-MS

For larger sizes please contact us

Corrosion Resistance: 240 hours NSS Test

Fastening: 7mm A/F screw

Industry Recommendations:-

Quality Assurance:-



Mild Steel Zinc Protected

The finest hose clip in the world

Original Range

Mild Steel Zinc Protected:



The most versatile of clips in the Jubilee® range, our Original Range Jubilee® hose clips in 304 (18/8) stainless steel are widely used across all industries where hose clips are used to secure hoses, as well as for other applications. Their corrosion resistance enables their use in the marine, oil and gas and food sectors, as well as the agricultural, hardware and industrial sectors, where higher corrosion resistance is required.



Part No.	BS No.	Adjustment mm	Adjustment Inches	Band Width mm	Band Thickness mm	Recommended Torque Nm	Maximum Torque Nm	Maximum Pressure Psi	Part No.
000-SS	12	9.5- 12	3/8- 1/2	9.9	0.762	3.4	4.5	203	000-SS
M00-SS	16	11- 16	1/2-5/8	9.9	0.762	3.4	4.5	203	M00-SS
00-SS	20	13- 20	1/2-3/4	9.9	0.762	3.4	4.5	203	00-SS
0-SS	22	16- 22	5/8- 7/8	13.0	0.914	4.2	5.6	203	0-SS
OX-SS	25	18- 25	3/4-1	13.0	0.914	4.2	5.6	203	OX-SS
1A-SS	30	22- 30	7/8-1 1/8	13.0	0.914	5.1	6.8	203	1A-SS
1-SS	35	25- 35	1-1 3/8	13.0	0.914	5.1	6.8	102	1-SS
1X-SS	40	30- 40	1 1/8-1 5/8	13.0	0.914	5.1	6.8	102	1X-SS
1M-SS	45	32- 45	1 1/4-1 3/4	13.0	0.914	5.1	6.8	102	1M-SS
2A-SS	50	35- 50	1 3/8-2	13.0	0.914	5.9	7.9	102	2A-SS
2-SS	55	40- 55	1 5/8-2 1/8	13.0	0.914	5.9	7.9	102	2-SS
2X-SS	60	45- 60	1 3/4 -2 3/8	13.0	0.914	5.9	7.9	102	2X-SS
3-SS	70	55- 70	2 1/8-2 3/4	13.0	0.914	6.7	9	102	3-SS
3X-SS	80	60- 80	2 3/8-3 1/8	13.0	0.914	6.7	9	44	3X-SS
4-SS	90	70- 90	2 3/4-3 1/2	13.0	0.914	6.7	9	44	4-SS
4X-SS	100	85-100	3 1/4-4	13.0	0.914	6.7	9	44	4X-SS
5-SS	120	90-120	3 1/2-4 3/4	13.0	0.914	6.7	9	44	5-SS
6-SS	140	110-140	4 3/8-5 1/2	13.0	0.914	6.7	9	44	6-SS
6X-SS	150	120-150	4 3/4-5 7/8	13.0	0.914	6.7	9	18	6X-SS
7-SS	165	135-165	5 1/4-6 1/2	13.0	0.914	5.9	7.9	18	7-SS
7 1/2-SS	190	158-190	6 1/4-7 1/2	13.0	0.914	5.9	7.9	18	7 1/2-SS
8 1/2-SS	216	184-216	7 1/4-8 1/2	13.0	0.914	5.9	7.9	18	8 1/2-SS
9 1/2-SS	242	210-242	8 1/4-9 1/2	13.0	0.914	5.9	7.9	18	9 1/2-SS
10 1/2-SS	267	235-267	9 1/4-10 1/2	13.0	0.914	5.9	7.9	18	10 1/2-SS
11 1/2-SS	292	260-292	10 1/4-11 1/2	13.0	0.914	5.9	7.9	18	11 1/2-SS
12 1/2-SS	318	286-318	11 1/4-12 1/2	13.0	0.914	5.9	7.9	18	12 1/2-SS

For larger sizes please contact us

Corrosion Resistance: 1000 hours NSS Test

Fastening: 7mm A/F screw

Industry Recommendations:-



Quality Assurance:-

304 Stainless Steel

